

### Product Brief

## Overview

The ATM2202 is part of a family of extreme low-power Bluetooth® 5 system-on-a-chip (SoC) solutions. This Bluetooth Low Energy SoC integrates a Bluetooth 5 radio with an ARM® Cortex® M0 processor and state-of-the-art power management to enable maximum lifetime in battery operated devices. Integrated Flash supports up to 1MB of code and data storage.

The extremely low power ATM2202 SoC is designed with an extensive set of peripherals and flexible I/O to support a wide variety of applications across the consumer, commercial, and industrial Internet of Things (IoT) markets.

The ATM2202 is available in a 40 pin QFN package.

## Applications

### Industrial and Enterprise

- Beacons and Sensors
- Asset Tracking
- Environmental Monitors

### Healthcare

- Thermometers
- Asset Tracking
- Patient Monitoring

### Home


- Home Automation
- Remote Controls
- Human Interface Devices (HID)

### Personal

- Wearables

### Auto

- Key fobs and Accessories

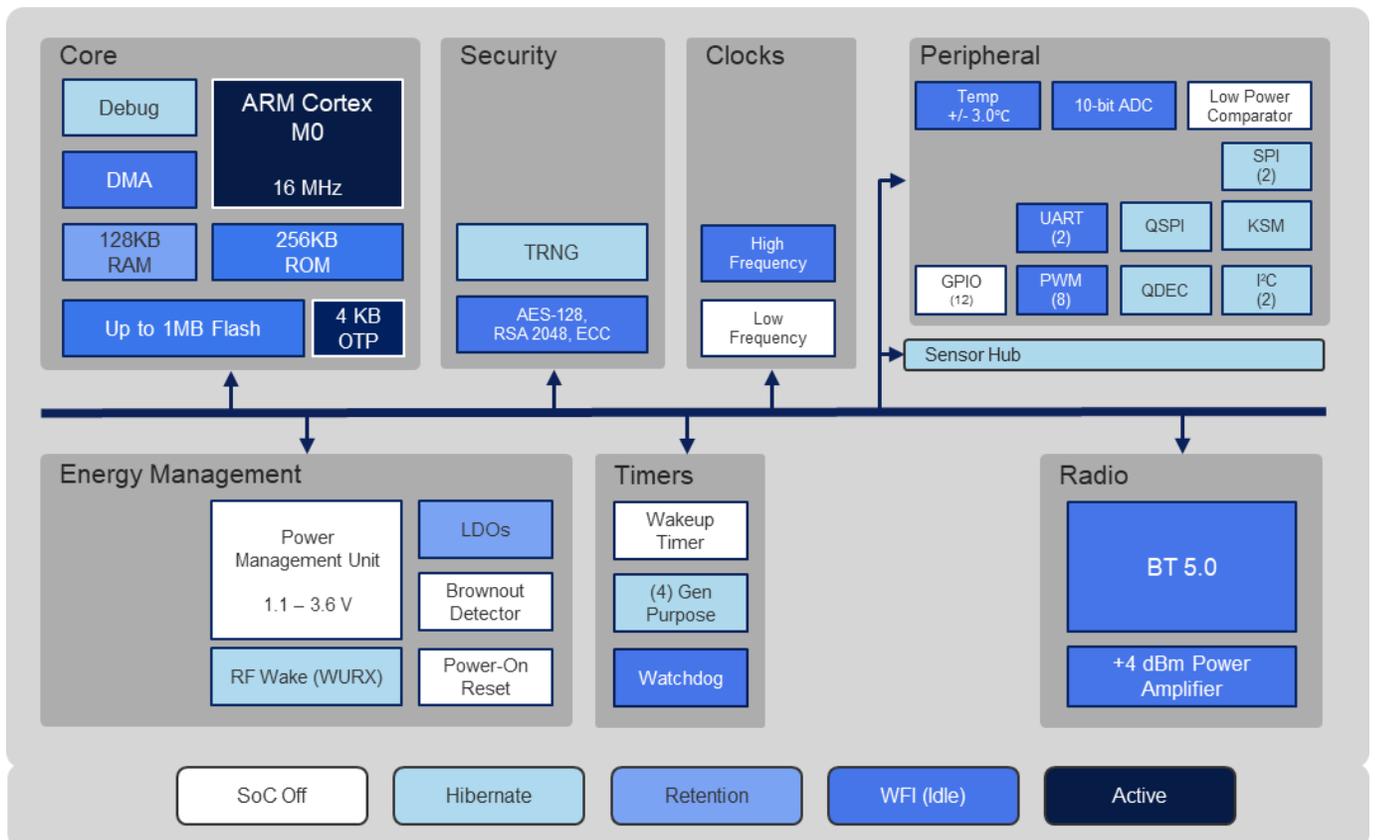

## Features

The **Power Management Unit** has a very efficient integrated DC/DC Buck-Boost converter providing the core and I/O power for the SoC. This feature can be bypassed if a power source is available elsewhere in the system.

An integrated **Sensor Hub** is a configurable hardware element that can read data from external sensors and write to the QSPI Flash while all other power domains are powered down. The sensor hub can also trigger a wakeup of the CPU if the data read falls outside programmed thresholds

The independent **RF Wakeup Receiver** is designed to look for an incoming paging or wakeup signal while the rest of the SoC remains in a very low power state. The separate receiver supports short range reception of a configurable signal from a Bluetooth device, mobile phone, or a dedicated transmitter.

The extensive set of **Peripherals** on the ATM2202 includes multiple UART cores, two I2C masters, and two general purpose SPI masters. Dedicated hardware supports a Pulse Density Modulated (PDM) digital microphone, multiple Pulse Width Modulation (PWM) outputs, Quadrature decoder (QDEC) for mouse inputs, Keyboard Matrix Controller (KSM), Analog Comparator, and 10-bit Application ADC. Flexible pin muxing allows the needed signals to be routed to the I/O pins based on the application and product requirements.

A complete **Software Development Environment** allows developers to customize the existing ROM-based application or to develop a custom application that runs from external memory.

Available directly from Atmosic, an **Evaluation Kit** supports performance evaluation, software customization, and complete product development.

## Specifications

Bluetooth Version	Bluetooth LE 5.0
Data Rates Supported	2 Mb/s, 1 Mb/s, 500 kb/s, 125 kb/s
Output Power	-20 dBm to +4 dBm
Receive Sensitivity	-95 dBm @ 1 Mb/s
Input Voltage	1.1 V to 3.3 V
Power Consumption@ 3V	1.0 mA RX @-95 dBm 2.5 mA TX @0 dBm
CPU	16 MHz ARM® Cortex® M0 processor
On-Chip Memory	256 KB ROM, 128 KB RAM, up to 1 MB QSPI Flash, 4 KB OTP
RAM Retention	16 KB to 128 KB in 16 KB steps
Security Hardware	AES-128, True Random Number Generator (TRNG)
GPIO	12 (configurable)
Timers	4 General Purpose with separate dedicated Wakeup Timer.
Peripherals	I2C, SPI, UART, PDM, PWM, QDEC, KSM, ADC
Operating Temperature Range	-40°C to +85°C
Package Options	ATM2202: 5x5 mm 40-pin QFN

### ATMOSIC TECHNOLOGIES - DISCLAIMER

This product brief is intended to be a general informational aid and not a substitute for any literature or labeling accompanying your purchase of the Atmosic product. Atmosic reserves the right to amend its product literature at any time without notice and for any reason, including to improve product design or function.

[www.atmosic.com](http://www.atmosic.com)